


A QUICK GUIDE TO THE BASIC RULES OF THUMB FOR PAVEPAD



ADJUST FOUR DIFFERENT LEVELS IN ONE AND THE SAME STACK OF PAVEPAD
SAVE SPACE, TIME AND MONEY

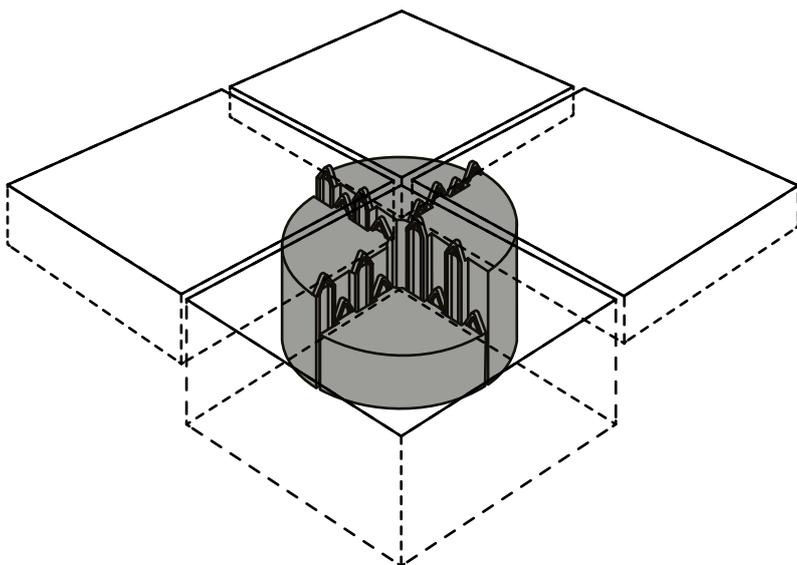

Why you should choose PavePad:

- You save space under the deck
- Assembly is quicker, making you more efficient and timesaving
- You need fewer stackable paving supports, which saves you money



PaveShim 1,5 mm



PaveDamper 4,5 mm



PavePad 7,5 mm



PavePad 15 mm



PavePad 45 mm



PavePad 90 mm

This is how you stack PavePads



Always use the size of Pavepads, which is closest to the height you need, for better building economy.

Devision of PavePads



PavePads can be divided by hand.

Midsection 1/1





Sides 1/2

Corner 1/4

Straight pattern

Brick pattern

Extra strong support

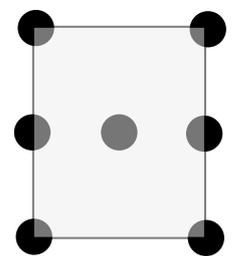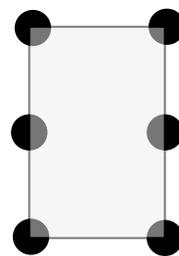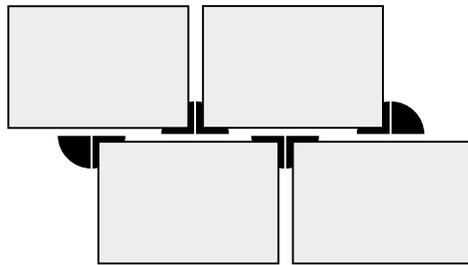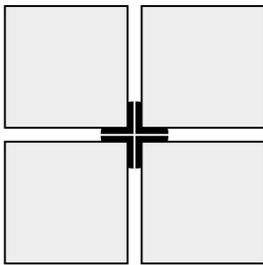

Whole PavePads


Half PavePads

Side support

Side and center support

Displacement technique:


How to correctly secure PavePads against a curved edge or wedge

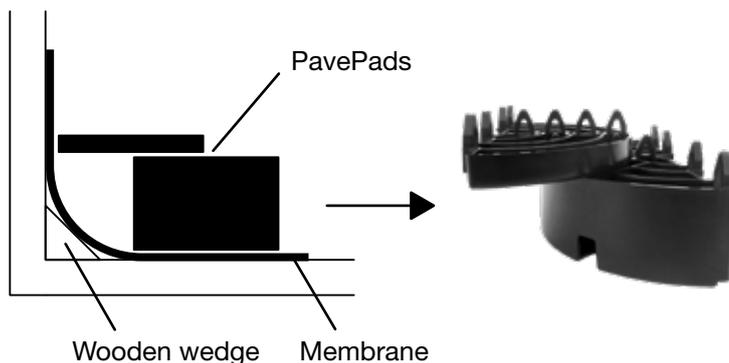


By dividing and displacing the PavePads, they are able to securely reach the edge of your deck, across a curve or wedge.

Different size tiles


PavePad can adjust to four different heights of tile:



Use the shim for fine adjustments:  Shim 1,5 mm

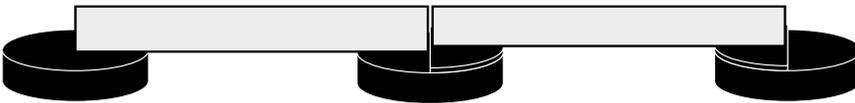


PavePad can also adjust for uneven tiles:

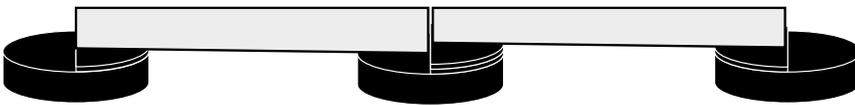


Metal grating

Place both metal grate and tile on the PavePads.

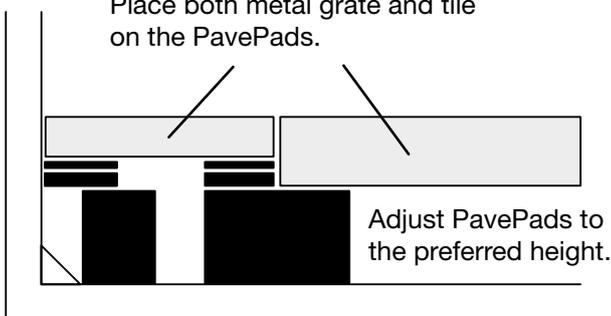

Wooden decking and center supports

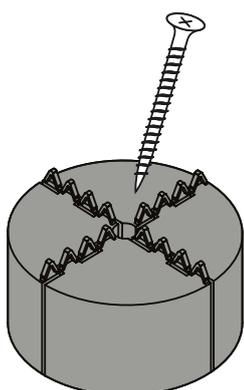


You can fasten wooden beams to a PavePad, with screws up to 6mm diam., without risking spilt in the PavePad.





Example for tiles on a terrace

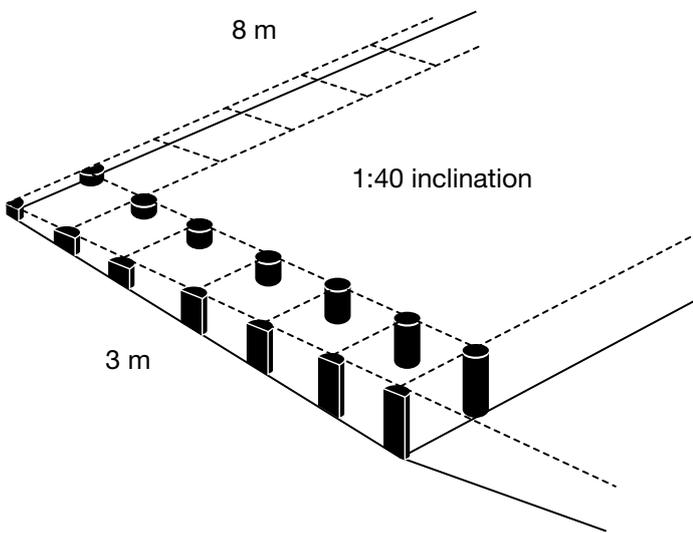

Tile size 50x50 cm.


Start in a corner of the terrace, aligning the different heights of the PavePads, towards the center.

1st row is half and quarter pieces of PavePads. See below for row 2-16:

Stack	Height	PP 90	PP 45	PP 15	PP 7.5	Shim 1.5
S1	15	0	0	1	0	0
S2	27	0	0	1	1	3
S3	40.5	0	0	2	1	2
S4	52.5	0	1	0	1	0
S5	64.5	0	1	1	0	3
S6	78	0	1	2	0	2
S7	90	1	0	0	0	0
Total amount		1	3	7	3	10

Height of the PavePads:

15 mm 27 mm 40,5 mm 52,5 mm 64,5 mm 78 mm 90 mm

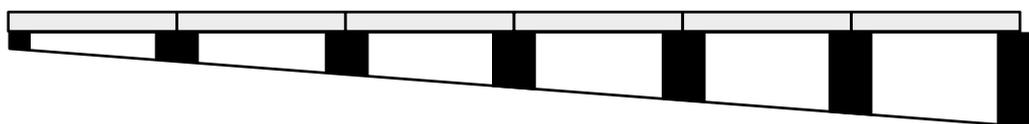

Starting height

Increasing height of PavePads

Lowest point

If you need any advise, please don't hesitate to contact us.

PavePad®
www.pavepad.com
info@pavepad.com
 +45 86 377 133

Excellent Systems A/S
 Møllevej 2
 DK - 8544 Mørke